

Digital Hybrid Wireless® UHF Belt Pack Transmitter



- Digital Hybrid Wireless for compandor-free audio
- 50 mW RF power
- Compatibility modes for use with analog receivers
- 25 or 100 kHz tuning steps
- Integrated multi-function switch for mute or talkback modes
- Wide range input gain control in 1 dB steps

The LMB transmitter can be configured to operate as a “one touch” device with a single power on/off switch on the top panel, or with full access to all operational parameters using the side panel membrane switches and LCD interface. The top panel switch can also be configured to provide a mute or talkback function.

This versatility makes the transmitter at home in a wide variety of applications from video production to theater, stage and house of worship.

The servo bias input accepts mic or line level signals with a wide range of gain adjustment in 1 dB steps. Accurate LED indications on the top panel and a bar graph indicator on the LCD allow precise gain adjustments to be made for the maximum signal to noise ratio and minimum distortion. The limiter in the preamp can cleanly handle signal peaks over 30 dB above full modulation, allowing the input gain to be set high enough to achieve the maximum signal to noise ratio.



Along with providing peerless audio quality with wide frequency response and dynamic range in Nu Hybrid mode, the technology used in the LMB includes compatibility modes for Lectrosonics Mode 3 and IFB receivers.

The housing is an aluminum extrusion with machined aluminum top and control panels, finished with an ultra hard, black electroless nickel finish called **ebENi**.

Digital Hybrid Wireless® is a patented design that combines 24-bit digital audio with an analog FM radio link to provide outstanding audio quality and the extended operating range of the finest analog wireless systems.

The design overcomes channel noise in a dramatically different way, digitally encoding the audio in the transmitter and decoding it in the receiver, yet still sending the encoded information via an analog FM wireless link.

This proprietary algorithm is not a digital implementation of an analog compandor. Instead, it is a technique which can be accomplished only in the digital domain, even though the audio inputs and outputs are analog signals.

*US Patent 7,225,135

Power is provided by two AA batteries in series. Battery polarity is indicated by a label inside the compartment. The machined aluminum battery door latches closed securely, and cannot be jarred open accidentally.




Spring contacts inside the compartment and nickel plated contacts on the door keep the batteries from rattling and provide reliable electrical contacts. The unit is protected from reverse battery polarity electrically, and by the insulated contact plate in the battery door.



The membrane switch panel and LCD enable access to all adjustments and settings. The menu structure is easy to navigate. Battery status is indicated by a bi-color LED that is green with a fresh battery, then turns to red as the battery runs down, and finally starts blinking red when there is about 30 minutes of runtime remaining.

The Main Window displays the current settings, including frequency, battery status, RF output status and audio level (modulation).

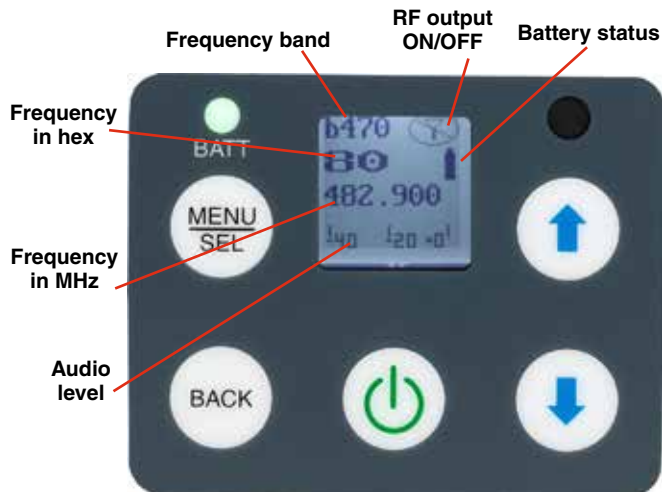

Specifications

Operating Frequencies:
 Band A1: 470.100 - 537.575
 Band B1: 537.600 - 607.950

Frequency Selection Steps: Selectable; 100 kHz or 25 kHz
 RF Power output: 50 mW
 Compatibility Modes (3): Nu Hybrid, Mode 3, IFB
 Pilot tone: 3.5 kHz deviation (Nu Hybrid)
 Frequency Stability: $\pm 0.002\%$
 Spurious radiation: Compliant with ETSI EN 300 422-1 v1.4.2
 Equivalent input noise: -120 dBV (A-weighted)
 Input level: Nominal 2 mV to 300 mV, before limiting
 Greater than 1V maximum, with limiting.
 Input impedance: 2k Ohm
 Input limiter: DSP controlled, dual envelope "soft" limiter with greater than 30 dB range
 Gain control range: 44 dB; digital control
 Modulation indicators:

- Dual bicolor LEDs indicate modulation of -20, -10, 0 and +10 dB referenced to full modulation
- LCD bar graph

 Audio Performance (Nu Hybrid mode)
 Frequency Response: 90 Hz to 20 kHz (+/-1dB)
 Low frequency roll-off: -12 dB/octave; 70 Hz
 THD: 0.2% (typical)

SNR at receiver output:	SmartNR	No Limiting	w/Limiting
	OFF	103.5	108.0
Note: The dual envelope "soft" limiter provides exceptionally good handling of transients using variable attack and release time constants. Once activated, the limiter compresses 30+ dB of transmitter input range into 4.5 dB of receiver output range, thus reducing the measured figure for SNR without limiting by 4.5 dB	NORMAL	107.0	111.5
	FULL	108.5	113.0

Controls:

- Top panel slide switch; programmable as **power**, **mute**, **talkback** or **no** (off) function
- Side panel membrane switches with LCD interface for power on/off and all setup and configuration controls

 Audio Input Jack: Switchcraft 5-pin locking (TA5F)
 Antenna: Galvanized steel, flexible wire
 Battery: Two AA lithium
 Battery Life: Duracell Quantum: 7 hours
 Weight: 5 ounces (141 grams), including lithium AA batteries and wire belt clip
 Dimensions: 3.2 x 2.4 x .8 in. (81 x 61 x 20 mm)
 Emission Designator: 110KF3E

Specifications subject to change without notice.

